




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : G08B 13/14	A1	(11) International Publication Number: WO 99/19851 (43) International Publication Date: 22 April 1999 (22.04.99)
<p>(21) International Application Number: PCT/US98/18454</p> <p>(22) International Filing Date: 3 September 1998 (03.09.98)</p> <p>(30) Priority Data: 08/943,679 15 October 1997 (15.10.97) US</p> <p>(71) Applicant: ESCORT MEMORY SYSTEMS [US/US]; 3 Victor Square, Scotts Valley, CA 95066 (US).</p> <p>(72) Inventors: NICHOLSON, Mark; 3 Oak Creek Boulevard, Scotts Valley, CA 95066 (US). MONAHAN, Brian; 1865 Rodriguez Street, Santa Cruz, CA 95062 (US).</p> <p>(74) Agent: FRANCIS, Ralph, C.; Francis Law Group, 1946 Embarcadero, Oakland, CA 94606 (US).</p>		<p>(81) Designated States: AU, CA, JP, MX, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).</p> <p>Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p>

(54) Title: HIGH TEMPERATURE RFID TAG

(57) Abstract

A high temperature RFID tag (10,20) is described which has a survival temperature in the range of approximately -40°C to 300°C and an operating temperature of approximately -20°C to 200°C . The RFID tag comprises a housing (21) comprising a first thermally resistant material and having a base (24) and a top (22), and a circuit board substrate (26) which includes an IC circuit (28) and is disposed in a tag chamber (36), the substrate comprising a second thermally resistant material which is encapsulated in the housing. The thermally resistant materials exhibit a deflection temperature in a range of 287°C to 320°C .

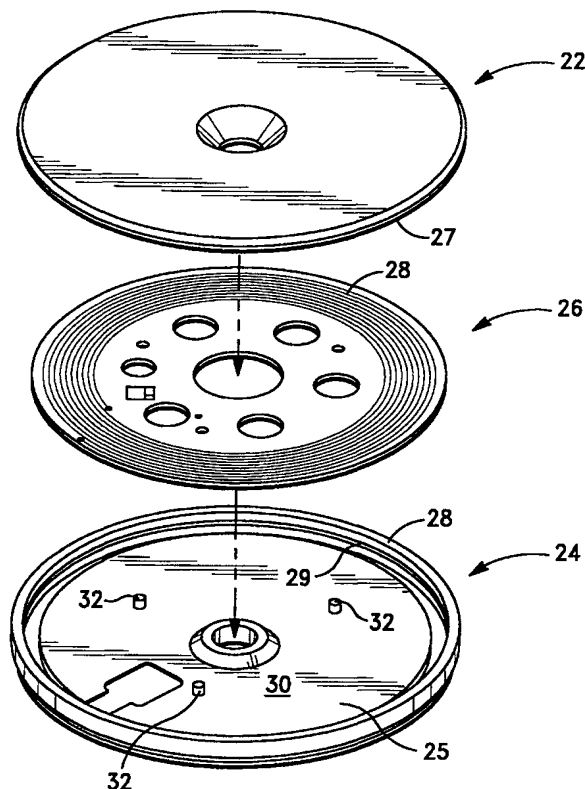

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

HIGH TEMPERATURE RFID TAG

FIELD OF THE INVENTION

The present invention relates in general to radio frequency identification (RFID)
5 devices, and more particularly to a high temperature RFID tag.

BACKGROUND OF THE INVENTION

RFID systems are well known in the art. Such systems include relatively large
packages containing battery powered transmission/receiving circuitry, such as the
10 identification system disclosed in U.S. Patent No. 4,274,083, to passive systems in which
the transceiver receives its power from the base station or interrogator, such as the
identification system disclosed in U.S. Patent No. 4,654,658.

A typical RFID system is made up of reusable tags fixed to or embedded in
product carriers, antennas that interrogate the tags via a RF link and a controller. The host
15 (or computer) system interfaces with the controller and directs the interrogation of the
tags.

RFID tags provide effective means of identifying, monitoring and controlling
materials in a closed loop process. In the factory, tags are employed as the transport
mechanism between "islands of automation," providing a record of each process which
20 can be acted upon immediately or downloaded later for analysis.

The tags can be powered by an internal battery (i.e., an "active" tag) or by
inductive coupling (i.e., a "passive" tag). Passive tags have zero maintenance and virtually
unlimited life. The life span of an active tag is, however, limited by the lifetime of the
battery, although some tags offer replaceable batteries.

RFID tags are packaged in a variety of forms and are fastened by a multitude of means. The tags are typically encapsulated for durability against shock, fluids, dust or dirt. Although such tags are immune to most environmental factors, they can, and in many instances will be, adversely affected by high temperature environments.

5 It is, therefore, an object of the present invention to provide a RFID tag having the capability of operating over a broad range of temperatures.

It is another object of the invention to provide a RFID tag which is capable of operation in harsh, high temperature factory environments.

10 SUMMARY OF THE INVENTION

The high temperature RFID tag of the present invention has a substantially enhanced survival temperature in the range of -40°C to 300°C. The tag also has a unique operating temperature in the range of -18°C to 135°C.

In accordance with the objects and advantages of the present invention, the high
15 temperature RFID tag comprises:

A housing having a base and a top, the base and the top forming a chamber therein, the housing comprising a first thermally resistant material; and

a circuit board substrate disposed within the chamber, the substrate including an integrated circuit, the substrate comprising a second thermally resistant material;

20 the housing and the circuit board having a survival temperature in the range of approximately -40°C to 300°C.

BRIEF DESCRIPTION OF THE DRAWINGS

Further features and advantages will become apparent from the following and more particular description of the preferred embodiments of the invention, as illustrated in the accompanying drawings, and in which like referenced characters generally refer to the same parts or elements throughout the views, and in which:

FIGURE 1 is a schematic illustration of a typical RFID system;

FIGURE 2 is a perspective view of a high temperature RFID tag according to the invention; and

FIGURE 3 is an exploded perspective view of the high temperature RFID tag shown in FIGURE 2.

DETAILED DESCRIPTION OF THE INVENTION

The high temperature RFID tag of the present invention substantially reduces or eliminates the disadvantages and shortcomings associated with prior art RFID tags.

According to the invention, a thermally resistant (i.e., high temperature) housing having a base and top, and a thermally resistant circuit board substrate having an integrated circuit (IC) thereon is provided to achieve the unique survival temperatures and high temperature operating capabilities of the tag.

By the term “operating temperature”, as used herein, it is meant to mean the temperature (and/or range thereof) at which the tag can perform the intended functions. The intended functions include read, write and fill functions.

By the term "survival temperature", it is meant to mean the temperature (and/or range thereof) at which the tag can be exposed without adversely affecting the performance characteristics of the tag upon returning to an operating temperature.

Referring first to FIGURE 1, there is shown a simple read/write RFID system. The system typically comprises one or more tags (or transponders) 10, containing some data in memory, at least one antenna 12 to communicate with the tags 10, and a controller 14 for managing the communication interface. The host system 16 interfaces with the controller 14 and directs the interrogation of the tags 10 disposed on or embedded in the product carriers 11 and any following action via parallel, serial or bus communications 18.

Referring now to FIGURE 2, there is shown a perspective view of a preferred embodiment of the high temperature RFID tag 20 of the present invention. In the noted embodiment, the tag 20 comprises a passive read/write tag. However, as will be appreciated by one having ordinary skill in the art, the concepts of the illustrated embodiment can be incorporated into fabricated active systems.

As illustrated in FIGURE 2, the tag 20 preferably has a substantially cylindrical shape, with a diameter in the range of approximately .25 in. to 5.0 in., preferably approximately 1.0 in. The tag 20 is thus capable of being attached to or embedded in various surface configurations and limited surface areas.

In additional envisioned embodiments of the invention, not shown, the tag has a substantially square shape. In accordance with this embodiment, the surface dimension of the tag is preferably in the range of 1 in. to 3 in. (i.e., 1 in. X 1 in., 2 in. X 2 in., 3 in. X 3 in.).

As will be appreciated by one having ordinary skill in the art, the high temperature tag of the present invention can comprise various shapes. The tags can also include various conventional attachment means.

According to the invention, the tag housing 21 preferably includes a housing base 24 and top 22 (see Fig.3). In additional envisioned embodiments of the invention, not shown, the housing 21 can also comprise a one piece, molded unit.

As illustrated in FIGURE 3, the base 24 comprises a substantially cylindrical bottom portion 25 with a circumferential wall 28 disposed on the outer edge, defining a tag chamber 30 therein. The wall 28 preferably includes a cap seat 29 which is adapted to position the housing cap 22.

The base 24 includes a plurality of inwardly projecting suspension pins 32, disposed on the inner surface of the base bottom 25. The pins 32 are adapted to support the circuit board substrate 26 when positioned in the base 24.

As illustrated in FIGURES 2 and 3, the housing top 22 has a correspondingly similar substantially cylindrical shape. The cap 22 is provided with a lower engagement portion 27 which is adapted to slidably engage the inside surface of the cap seat 29.

A key feature of the present invention is the unique high temperature resistance of the housing 21. According to the invention, the housing 21 comprises a high thermally resistant material, such as Teflon[®] or a Ryton[®] PPS compound, which can be exposed to high temperatures without materially affecting the material's properties and/or characteristics. In a preferred embodiment, the housing comprises the Ryton[®] PPS compound, R-4 02XT. The noted thermally resistant materials exhibit a deflection temperature in a range of 287°C to 320°C.

Disposed in the tag chamber 30 is the circuit board substrate 26. The substrate includes an IC circuit 28 preferably disposed on one surface thereof. As stated, the base 24 is provided with suspension pins 32 to position the circuit board 26 in the base 24.

As illustrated in FIGURE 3, the circuit board 26 is similarly substantially
5 cylindrically shaped and is adapted to be positioned within the tag chamber 30. According to the invention, the IC circuit 28 comprises copper or other like material and is clad to the circuit board 26 by conventional means.

In a preferred embodiment, the IC circuit 28 is die bonded to the circuit board 26 via a gold brazing material and is encapsulated using a high temperature epoxy, such as
10 Eccobond® "104". The noted materials exhibit excellent performance characteristics over a broad range of temperatures and, hence, protect the circuit 28 at elevated temperatures.

According to the invention, the circuit board 26 similarly comprises a high thermally resistant material, such as a pre-conditioned polyimide or a ceramic compound. In a preferred embodiment, the circuit board 26 comprises a pre-conditioned polyimide
15 having a Tg of 300°C.

Referring to FIGURE 2, the housing top 22 is sealably molded to the housing base 24, encapsulating the circuit board 26 therein. According to the invention, the top 22 is injection molded to the base 24 to provide effective encapsulation. As will be appreciated by one having ordinary skill in the art, various encapsulation methods may be employed
20 within the scope of the invention, such as the one piece, molded housing discussed above.

Applicant's have found that the high temperature RFID tag of the present invention has a survival temperature range of approximately 40°C to 300°C and exhibits superior performance characteristics over the operating temperature range of approximately -18°C

to 135°C. The tags may thus be employed in various high temperature industrial environments and/or operations, such as painting operations and engine fabrication, which has not been possible with prior art tags.

While preferred embodiments and their technical advantages have been described
5 in the above detailed description and illustrated in the drawings, the present invention is not limited thereto but only by the scope and spirit of the appended claims.

CLAIMSWhat is Claimed is:

1. A high temperature RFID tag, comprising:
a housing having base and a top, said base and said top forming a chamber
5 therein, said housing comprising a first thermally resistant material; and
a circuit board substrate disposed within said chamber, said substrate
including an integrated circuit, said substrate comprising a second thermally resistant
material;
said housing and said circuit board providing a survival temperature in the
10 range of approximately -40°C to 300°C.
2. The RFID tag of Claim 1, wherein said operating temperature is in the
range of -18°C to 135°C.
3. The RFID tag of Claim 1, wherein said circuit board is encapsulated in said
housing.
- 15 4. The RFID tag of Claim 3, wherein a high temperature epoxy is employed to
encapsulated said circuit board.
5. The RFID tag of Claim 1, wherein said first thermally resistant material
comprises Teflon®.
6. The RFID tag of Claim 1, wherein said first thermally resistant material
20 comprises a Ryton® PPS compound.
7. The RFID tag of Claim 1, wherein said second thermally resistant material
comprises a polyimid.
8. The RFID tag of Claim 7, wherein said polyimid is pre-conditioned.

9. The RFID tag of Claim 1, wherein said second thermally resistant material comprises a ceramic compound.
10. The RFID tag of Claim 1, wherein said housing has a substantially cylindrical shape.
- 5 11. The RFID tag of Claim 1, wherein said housing has a substantially square shape.
12. The RFID tag of Claim 1, wherein said tag includes an internal battery.

1/2

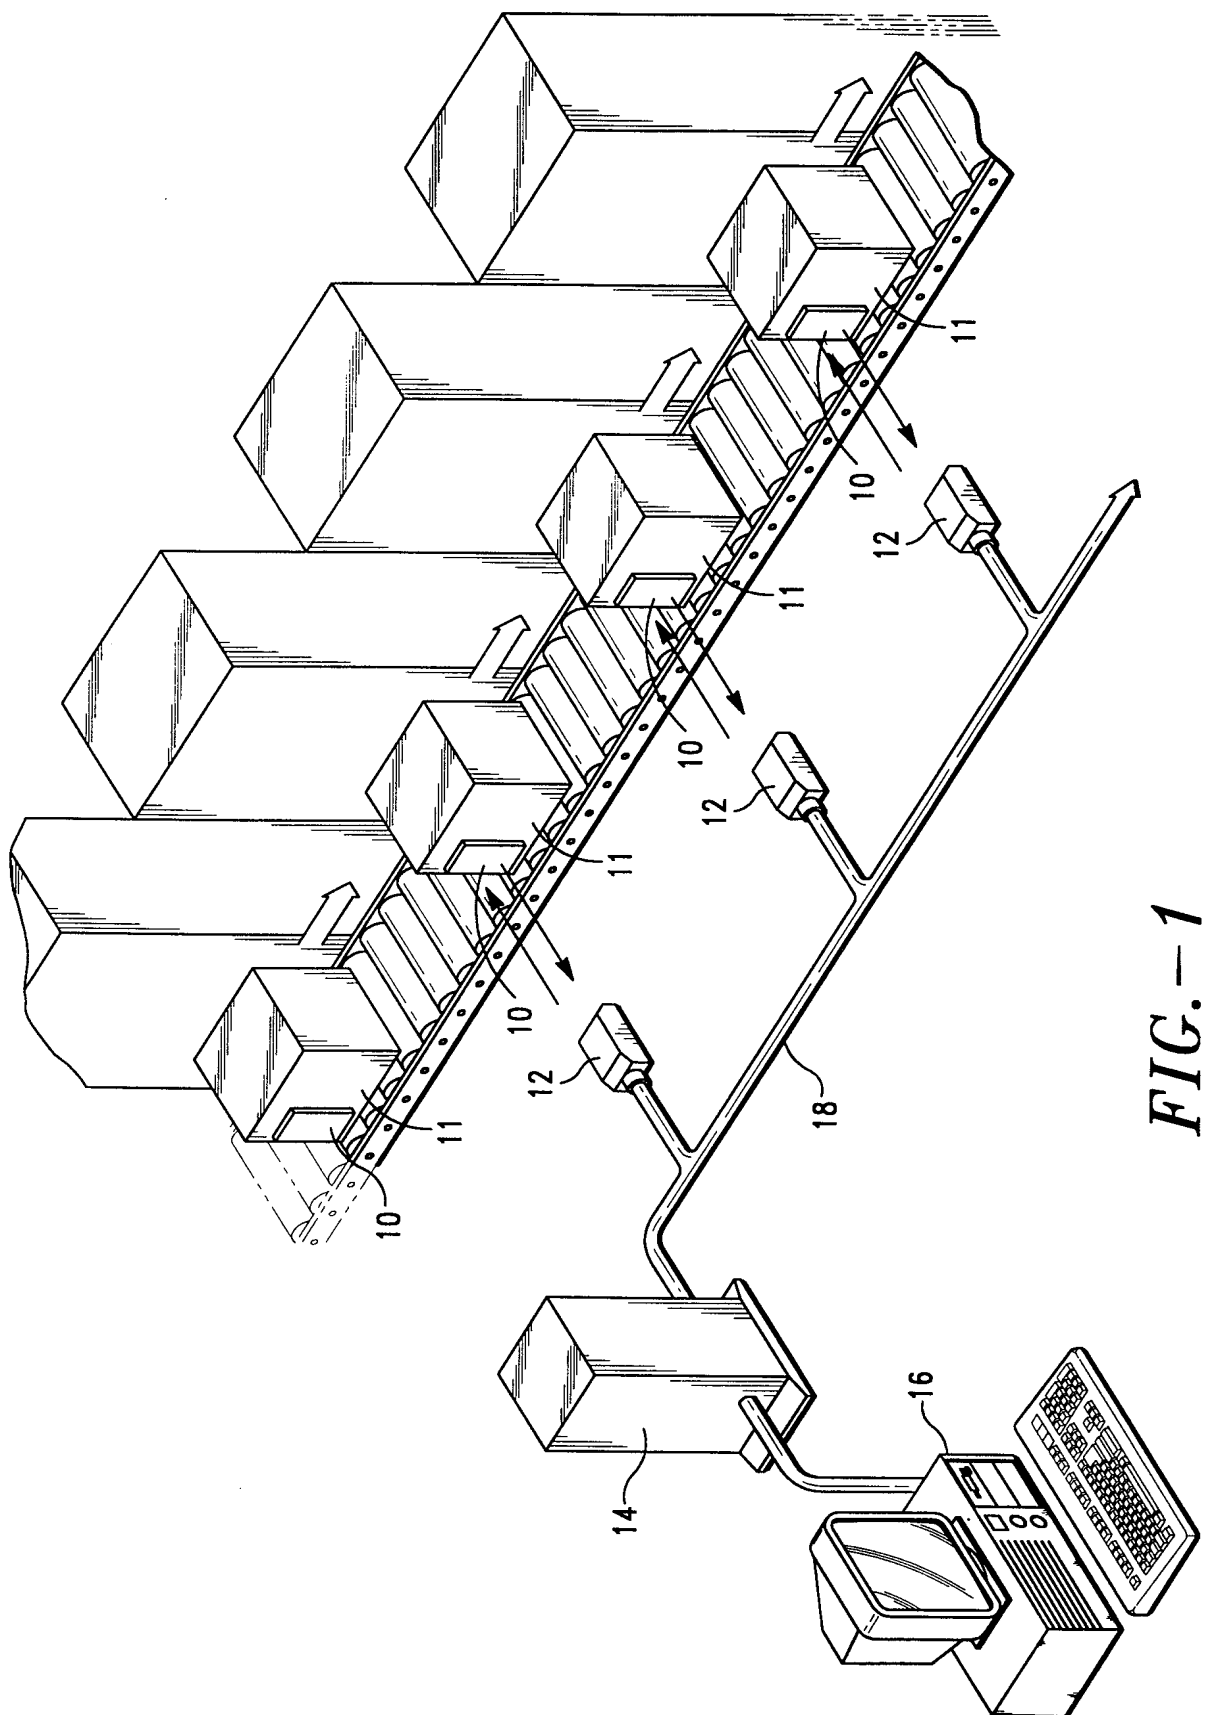


FIG. -1

2/2

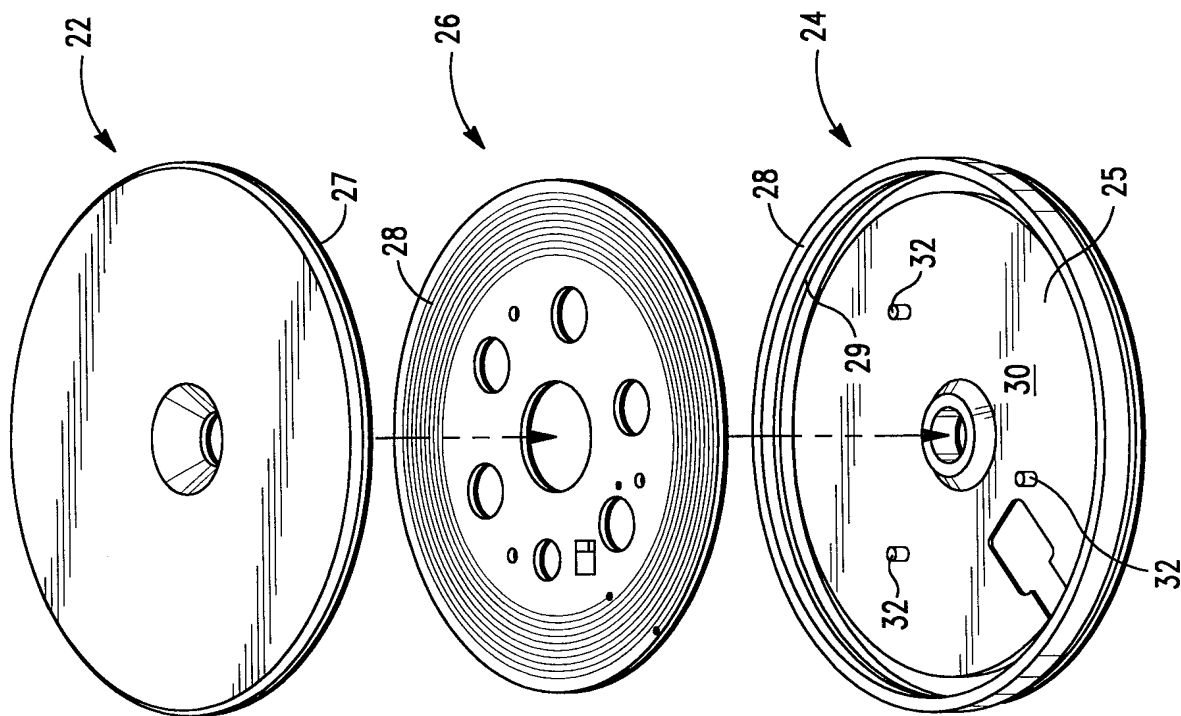


FIG.-3

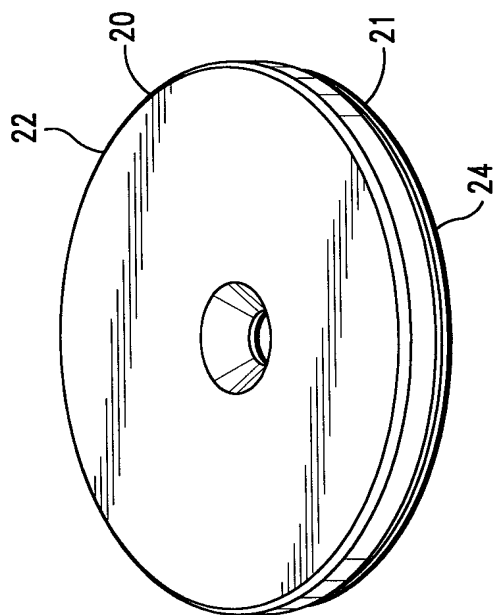


FIG.-2

INTERNATIONAL SEARCH REPORT

 International application No.
PCT/US98/18454

A. CLASSIFICATION OF SUBJECT MATTER

IPC(6) :G08B 13/14

US CL :340/572.8

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 340/572.8,825.54,825.34,825.72; 342/42,44,51; 364/468.22,468.23; 361/719,720,748; 174/52.2; 257/787,788,792,793; 235/487

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
NONEElectronic data base consulted during the international search (name of data base and, where practicable, search terms used)
NONE

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 5,646,592 A (TUTTLE) 08 July 1997, Fig. 2.	1-12
Y	US 4,656,463 A (ANDERS et al.) 07 April 1987, Fig. 7 and col. 8, line 55.	1-12
Y	US 5,528,222 A (MOSKOWITZ et al.) 18 June 1996, Fig. 3 and col. 5, lines 4-5.	1-4,6-12
Y	US 5,181,020 A (FURUKAWA et al.) 19 January 1993, col. 9, lines 21-30.	1-12
Y	US 5,580,664 A (TSAI) 03 December 1996, col. 6, lines 58-60.	1-12
Y	US 5,428,188 A (DOZIER) 27 June 1995, col. 8, lines 19-20.	4



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
A document defining the general state of the art which is not considered to be of particular relevance	*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
E earlier document published on or after the international filing date	*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*G* document member of the same patent family
O document referring to an oral disclosure, use, exhibition or other means	
P document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

10 NOVEMBER 1998

Date of mailing of the international search report

08 MAR 1999

 Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

THOMAS MULLEN

Telephone No. (703) 305-4382

Joni Hill

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US98/18454

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 4,737,789 A (NYSEN) 12 April 1988, Fig. 4 and col. 6, lines 19-21.	6
Y	US 4,578,573 A (FLIES et al.) 25 March 1986, Fig. 9 and col. 4, lines 46-53.	6
Y	US 5,232,765 A (YANO et al.) 03 August 1993, the Abstract.	9
Y	US 5,294,477 A (KANBA et al.) 15 March 1994, col. 5, lines 1-15.	9
Y	DE 3,609,105 A1 (LEIENDECKER) 01 October 1987, Fig. 1.	10
Y	EP 0,594,324 A2 (THURMOND et al.) 27 April 1994, Fig. 1.	10